

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 049 288 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.11.2000 Bulletin 2000/44

(51) Int Cl.7: H04L 9/22

(21) Application number: 00303587.0

(22) Date of filing: 28.04.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Gu, Zhengou
Plano, TX 75025 (US)

(74) Representative: Potter, Julian Mark
D. Young & Co.,
21 New Fetter Lane
London EC4A 1DA (GB)

(30) Priority: 30.04.1999 US 302608

(71) Applicant: Texas Instruments Incorporated
Dallas, Texas 75251 (US)

(54) Pseudo-noise sequence

(57) An augmented pseudo-noise sequence (10) is generated from a two or more pseudo-noise sequences, using LFSRs or other such devices. A segment (16) of a one pseudo-noise sequence (14), having an arbitrary

length, is inserted into another pseudo-noise sequence (12) at an arbitrary position, making the augmented sequence difficult to decipher by a third party. Additional segments of arbitrary length can also be inserted at arbitrary positions for further complexity.

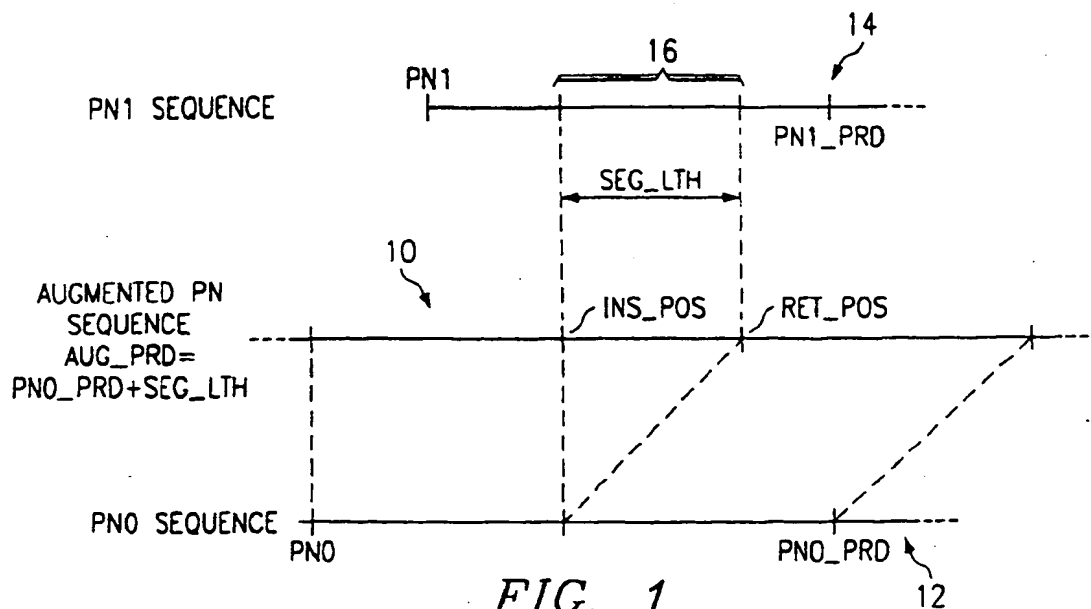


FIG. 1

EP 1 049 288 A2

Description

[0001] A copy of USSN 09/222 454, entitled "State Calculation Circuit for Discrete Linear State Space Model" to Gu, filed 29 December 1998 is furnished herewith on the filing date of this application to be placed in the European Patent Office dossier for this application and made available for public inspection on and from the date of publication of this application and is incorporated herein by reference.

[0002] This invention relates in general to communications and, more particularly, but not exclusively, to spread spectrum communications and data encryption.

[0003] Spread spectrum communication devices have been used in military and commercial devices for many years. These devices use noise-like waves to spread (cover) the information bits so that transmission bandwidth is much wider than that required for simple point-to-point communication. DS-CDMA (Direct Spreading Code Division Multiple Access) is a form of spread spectrum which uses a conventional communication waveform and a pseudo-noise (PN) sequence to transmit information. The PN sequence is commonly generated using a Linear Feedback Shift Register (LFSR).

[0004] In addition to its improved capacity and quality, spread spectrum techniques provide secure communications. Since the receiver will generate the same PN sequence as the transmitter. While normal spread spectrum devices are very secure relative to other communication devices, it is possible to determine the polynomial being used to generate the pseudo-noise sequence, since there are a finite number of polynomials for a given sequence length. While third-party deciphering the pseudo-noise sequence may require significant computing power, it is possible that such resources may be available to decipher highly confidential communications.

[0005] Accordingly, a need has arisen for a method and apparatus for generating a PN sequence which is difficult to decipher.

[0006] In an aspect of the present invention, a communication signal is encrypted using an augmented pseudo-noise sequence. The augmented pseudo-noise sequence is created by generating a plurality of pseudo-noise sequences and combining these pseudo-noise sequences, or portions thereof. The data signal is encrypted using the augmented pseudo-noise sequence.

[0007] An embodiment of the present invention provides significant improvements over the prior art. Insertion of one or more segments of arbitrary length from other PN sequences in real time at respective arbitrary points in a PN sequence creates a PN sequence which is almost impossible to decipher. For each period of the augmented PN sequence, the segment parameters and insertion points may change, further increasing the complexity in decrypting the PN sequence.

[0008] For a more complete understanding of embod-

iment of the present invention, and the advantages thereof, reference is now made to the following description, made by way of example only, taken in conjunction with the accompanying drawings, in which:

Figure 1 illustrates a general overview of an augmented PN sequence;

Figure 2 illustrates a preferred embodiment of an augmented sequence which allows for an offset and describes the formation of the augmented sequence;

Figure 3 illustrates a schematic representation of a circuit for generating the augmented sequence of Figure 2;

Figure 4 illustrates a schematic representation of an augmented sequence using multiple segments; and Figure 5 illustrates use of the augmented pseudo-noise sequence to encode a data signal.

[0009] An embodiment of the present invention is best understood in relation to Figures 1 - 5 of the drawings, like numerals being used for like elements of the various drawings.

[0010] Figure 1 illustrates a general overview of an augmented PN sequence 10 for use in spread spectrum devices, or any other device using a PN sequence, formed from two or more PN sequences, PN0 sequence 12 and PN1 sequence 14. The augmented PN sequence 10, PN0 sequence 12 and PN1 sequence 14 could be streams of real or complex numbers, depending upon the application. For example, in a QPSK DS-CDMA system, the augmented PN sequence 10, PN0 sequence 12, and PN1 sequence 14 would be sequences of complex numbers, $PN(k) = PN(k)_I + jPN(k)_Q$, where $PN(k)_I$ and $PN(k)_Q$ are one bit values. Many other systems use sequences of real numbers.

[0011] A segment 16 of the PN1 sequence 14, which may be all or part of the PN1 sequence, is inserted into the PN0 sequence 12 at an arbitrary position INS_POS of the augmented PN sequence. Segment 16 has arbitrary length SEG_LTH.

[0012] In operation, the augmented PN sequence 10 can be used by a data scrambling device in place of the normal, unaugmented PN sequence. Because the augmented PN sequence includes insertion of a second sequence of arbitrary length at an arbitrary position in the augmented PN sequence, determining the polynomial would be exceedingly difficult, even using supercomputers.

[0013] It should be noted that while the embodiment of Figure 1 illustrates an augmented PN sequence wherein a single segment 16 is inserted into another PN sequence, multiple segments from multiple PN sequences could be inserted into the pseudo-noise sequence, making it even more difficult to decrypt. Further, the starting and ending points of the segment(s) and the insertion point(s) can be modified as often as every period of the augmented PN sequence to further increase

complexity.

[0014] Figure 2 illustrates a preferred embodiment which allows for an offset and describes the formation of the augmented sequence in greater detail. The offset allows greater flexibility for synchronization within the system. Figure 2 illustrates the Augmented PN sequence 10, PN0 sequence 12, PN1 sequence 14, relative to a reference clock (REF_CT) 20. The reference clock 20 has the same period (AUG_PRD) as the augmented PN sequence 10. OFFSET defines the shift between the starting point (the first word, where a "word" could be a one bit value for a PN sequence of real values or a two bit value for a PN sequence of complex values) of the augmented PN sequence 10 and the start of the reference clock 20. PN0 sequence 12 has a period of PN0_PRD and PN1 sequence 14 has a period of PN1_PRD. One period of the augmented PN sequence 10 is formed from a first segment of PN0 sequence 12 defined by words 0 through INS_IDX0-1 of the PN0 sequence 12, followed by a segment of from PN1 sequence (defined by a segment of SEG_LTH words starting at position BEGIN_IDX1 of the PN1 sequence 14), followed by a second segment of PN0 sequence 12 defined by words from position INS_IDX0 to PN0_PRD-1 of the PN0 sequence 12 (i.e., the remaining words of the PN0 sequence 12). Relative to the augmented PN sequence 10, the inserted segment is located in the sequence starting at position INS_POS and ending on RET_POS-1.

[0015] The output of the augmented PN sequence 10 can begin at any position in the augmented PN sequence 10. In the illustrated embodiment, the output of the augmented PN sequence 10 starts at the position labeled START.

[0016] Figure 3 illustrates a schematic representation of a circuit 30 which performs the function described hereinabove. The reference clock signal (REF_CT) is input to one input of a subtractor circuit 32 along with the OFFSET signal. The output of the subtractor circuit 32 is input to a modulo circuit 33 which calculates the remainder of a division of the output of subtractor circuit 32 by AUG_PRD. This remainder is coupled to the first input of dual port multiplexer 34 and to a first input to subtractor 36. The second input to subtractor 36 is the segment length (SEG_LTH), which is a constant during a given period of the augmented PN sequence (although it can change in subsequent periods). The output of subtractor 36 is coupled to the second input to multiplexer 34. The output of multiplexer 34 coupled to a modulo circuit 35 (generating the remainder resulting from a division of the output of the multiplexer 34 with PN0_PRD) which calculates idx_A, which specifies a current index in the PN0 sequence. This index is coupled to the transition matrix 37 which is used by the PN0 pseudo-noise sequence generator 38 (typically a LFSR or similar circuit) to generate the PN0 sequence. An embodiment for the LFSR and transition matrix are discussed in greater detail in U.S. Ser. No. 09/222,454, en-

titled "State Calculation Circuit for Discrete Linear State Space Model" to Gu, assigned to TEXAS INSTRUMENTS INCORPORATED of Dallas, Texas, filed December 29, 1998, which is incorporated by reference herein.

[0017] REF_CT is also coupled adder 40 along with the two's complement of INS_POS and BEGIN_IDX1 (see Figure 2) to adder 40, which sums the three inputs. The output of adder 40 is coupled to a first input of multiplexer 42 and to an input of adder 44. The second input of adder 42 is coupled to AUG_PRD (see Figure 2). The output of adder 44 is coupled to a second input of multiplexer 42. The output of multiplexer 42 is coupled to modulo circuit 46 (generating the remainder resulting from a division of the output of the multiplexer 42 with PN1_PRD). The output of modulo circuit 46 is idx_B, which specifies a current position in the PN1 sequence. This index is coupled to transition matrix 48 which is used by the PN1 pseudo-noise sequence generator 50 to generate the PN1 sequence. The outputs of PN sequence generators 38 and 50 are coupled to inputs of dual port multiplexer 51. The multiplexer 51 selects between the two PN sequences to generate the augmented PN sequence.

[0018] A bank of comparators 52-57 perform various comparisons used to control multiplexers 34 and 42, PN sequence generators 38 and 50 and multiplexer 51. Comparator 52 determines whether REF_CT is equal to INS_POS. Comparator 53 determines whether REF_CT is equal to RET_POS. Comparator 54 determines whether INS_POS is greater than RET_POS. Comparator 55 determines whether RET_POS is greater than REF_CT. Comparator 56 determines whether REF_CT is greater or equal to INS_POS. Comparator 57 determines whether REF_CT is greater or equal to (INS_POS - INS_IDX0) mod AUG_PRD. The outputs of comparators 54 and 55 are input to AND gate 58 to control multiplexer 42.

[0019] START is coupled first input gates in OR gates 60 and 62. The output of comparator 52 is coupled to the second input of OR gate 60 and the output of comparator 53 is coupled to the second input of OR gate 62. The output of OR gate 60 is coupled to a first input of AND gate 64 and the output of OR gate 62 is coupled to a first input of AND gate 66. The output of AND gate 64 is coupled to a control port on PN1 sequence generator 50 and the output of AND gate 66 is coupled to a control port on PN0 sequence generator 38. The control ports on sequence generators 38 and 50 load the correct PN states from transition matrices 37 and 48, respectively, and thus reset the sequence generators to a predetermined point in the respective sequence for each period of the augmented PN sequence.

[0020] The output of comparator 54 is also coupled to an inverted input of AND gate 68 and to a non-inverted input of AND gate 70. The output of comparator 55 is coupled to an input of AND gate 68 and to an input of OR gate 72. The output of comparator 56 is coupled to

an input of AND gate 68 and to an input of OR gate 72. The output of OR gate 72 is coupled to an input of AND gate 70. The outputs of AND gates 68 and 70 are coupled to inputs of OR gate 74. The output of OR gate 74 is the SEQ_SEL signal which controls multiplexer 51 to select which sequence, PN0 or PN1, is output as the augmented PN sequence. The output of OR gate 74 is also coupled to the inputs of AND gates 64 and 66 to make sure that only one of the two PN generators is selected at a given time.

[0021] The output of comparator 56 is also output to OR gate 76 through an inverted input and to AND gate 78 through an inverted input. The output of comparator 57 is coupled to a non-inverted input of OR gate 76 and to a non-inverted input of AND gate 78. Subtractor 80 receives INS_POS and INS_IDX0 (see Figure 2) and outputs the difference (INS_POS - INS_IDX0) to modulo circuit 82, which calculates (INS_POS - INS_IDX0) mod AUG_PRD. The output of modulo circuit 82 is coupled to the "B" input of comparator 57 and the sign bit of the difference calculation of subtractor 80 is coupled to an inverted input of AND gate 78 and to a non-inverted input of AND gate 84. The output of OR gate 76 is also coupled to an input of AND gate 84. The outputs of AND gates 78 and 84 are coupled to the inputs of OR gate 86. The output of OR gate 86 is the SEL0 signal which controls multiplexer 34.

[0022] In operation, the circuit works as follows. The SEQ_SEL signal output from OR gate 74 switches between the outputs of the PN0 sequence generator 38 and the PN1 sequence generator 50. The PN0 sequence is effectively paused while the PN1 segment is inserted into the augmented PN sequence. Switching between the PN0 and PN1 sequences can be accomplished either by pausing the generation of the PN0 or PN1 sequence when it is not selected by multiplexer 51 or by loading the sequence generators at appropriate times to start the sequence at a predetermined point. At steady state, the LOAD0 output from AND gate 66 starts the PN0 sequence at INS_IDX0 after the PN1 segment is complete. The LOAD1 output from AND gate 64 starts the PN1 segment at the BEGIN_IDX1 position when the augmented PN sequence has reached INS_POS.

[0023] At the initial time, the START signal together with the other control signals decide the first bit of the augmented PN sequence 10 for output, since the output can begin at any position within the PN0 sequence 12 or segment 16. The SEL0 signal (the output of OR gate 86) and the SEL1 signal (the output of AND gate 58), control the multiplexers 34 and 42 to select the correct PN index for T0 and T1, respectively, based on all of the input parameters. The SEL0 signal provides for subtraction of SEG_LTH from the output of the modulo circuit 33 after insertion of segment 16. The SEL1 signal accommodates the situation where the segment 16 spans the first bit of the augmented PN sequence 10, i.e., where INS_POS precedes the first bit of the augmented PN sequence 10 and the RET_POS is after the first bit

of the augmented PN sequence 10.

[0024] Figure 4 illustrates a timing diagram where the PN0 sequence is augmented by segments from PN1 and PN2. In this case, the segment from PN1 is inserted at INS_POS1 and the segment from PN2 is inserted at INS_POS2. Any number of PN sequences could be used to generate the augmented PN sequence. Further, the segments could be inserted into other segments; for example, the PN2 sequence segment could be inserted into the PN1 segment.

[0025] Figure 5 illustrates a block diagram showing the use of the augmented PN sequence to encrypt a data stream. The pseudo-noise sequence generator 30 outputs a sequence of pseudo-noise words PN(k) to scrambler 90 along with data stream D(k). Data stream D(k) could be any digital data stream which would benefit from scrambling techniques, such as a digital communication signal or a native digital signal such as the output of a computing device. In the preferred embodiment, the scrambler circuit 90 performs an exclusive-or operation on the digital data stream D(k) and the pseudo-noise sequence PN(k) to generate the output S.

[0026] The present invention provides significant improvements over the prior art. Insertion of a one or more segments of arbitrary length at respective arbitrary points in a PN sequence creates a PN sequence which is almost impossible to decipher.

[0027] Although the Detailed Description of the invention has been directed to certain exemplary embodiments, various modifications of these embodiments, as well as alternative embodiments, will be suggested to those skilled in the art. The invention encompasses any modifications or alternative embodiments that fall within the scope of the Claims.

[0028] Insofar as embodiments of the invention described above are implementable, at least in part, using a software-controlled programmable processing device such as a Digital Signal Processor, microprocessor or other processing device, it will be appreciated that a computer program for configuring the programmable device to implement the foregoing described methods is envisaged as an aspect of the present invention.

[0029] Suitably, the computer program is stored on a carrier medium in machine or device readable form, for example in solid-state memory or magnetic memory such as disc or tape and the processing device utilises the program or a part thereof to configure it for operation. The computer program may be supplied from a remote source embodied in a communications medium such as an electronic signal, radio frequency carrier wave or optical carrier wave. Such carrier media are also envisaged as aspects of the present invention.

[0030] The scope of the present disclosure includes any novel feature or combination of features disclosed therein either explicitly or implicitly or any generalisation thereof irrespective of whether or not it relates to the claimed invention or mitigates any or all of the problems addressed by the present invention. The applicant here-

by gives notice that new claims may be formulated to such features during the prosecution of this application or of any such further application derived therefrom. In particular, with reference to the appended claims, features from dependent claims may be combined with those of the independent claims and features from respective independent claims may be combined in any appropriate manner and not merely in the specific combinations enumerated in the claims.

Claims

1. A method of encrypting a digital signal comprising:
 - generating a plurality of pseudo-noise sequences;
 - combining said pseudo-noise sequences, or portions thereof, to generate an augmented pseudo-noise sequence; and
 - encrypting a data stream using the augmented pseudo-noise sequence.
2. The method of claim 1 wherein said generating step comprises the step of generating first and second pseudo-noise sequences.
3. The method of claim 1 or 2 wherein said generating step comprises the step of generating three or more pseudo-noise sequences.
4. The method of any preceding claim wherein said combining step comprises the step of inserting a segment of a first pseudo-noise sequence into a second pseudo-noise sequence at an arbitrary position in said second pseudo-noise sequence.
5. The method of claim 4 wherein said segment has an arbitrary length.
6. The method of claim 4 or 5 wherein said segment has arbitrary starting and ending positions within said first pseudo-noise sequence.
7. The method of any preceding claim and further comprising the step of starting the output of the augmented pseudo-noise sequence at an arbitrary position in the sequence.
8. The method of any preceding claim and further comprising the step of synchronizing the augmented pseudo-noise sequence to a reference clock.
9. The method of claim 8 wherein said synchronizing step comprises the step of synchronizing the augmented pseudo-noise sequence to a reference clock relative to an arbitrary offset.
10. Apparatus for encrypting a digital signal comprising:
 - two or more pseudo-noise sequence generators circuitry for combining said pseudo-noise sequences, or portions thereof, to generate an augmented pseudo-noise sequence; and an encrypting circuit for correlating the augmented pseudo-noise sequence with a data stream.
11. The apparatus of claim 10 wherein said generating step comprises the step of generating first and second pseudo-noise sequences.
12. The apparatus of claim 10 or 11 wherein said two or more pseudo-noise sequence generators comprises three or more pseudo-noise sequence generators.
13. The apparatus of any one of claims 10 to 12 wherein said combining circuitry comprises circuitry for inserting a segment of a first pseudo-noise sequence into a second pseudo-noise sequence at an arbitrary position in said second pseudo-noise sequence.
14. The apparatus of claim 13 wherein said segment has an arbitrary length.
15. The apparatus of claim 13 or 14 wherein said segment has arbitrary starting and ending positions within said first pseudo-noise sequence.
16. The apparatus of any one of claims 10 to 15 wherein said encrypting circuit performs an exclusive-or operation.
17. The apparatus of any one of claims 10 to 16 and further comprising circuitry for starting the output of the augmented pseudo-noise sequence at an arbitrary position in the sequence.
18. The apparatus of any one of claims 10 to 17 and further comprising circuitry for synchronizing the augmented pseudo-noise sequence to a reference clock.
19. The apparatus of claim 18 wherein said synchronizing circuitry comprises circuitry for synchronizing the augmented pseudo-noise sequence to a reference clock relative to an arbitrary offset.
20. A computer program comprising computer program means for configuring a processing device to implement any one of the methods of claims 1 to 9.
21. A computer program carrier medium, configured to carry a computer program according to claim 20.
22. An electronic signal comprising:

a data stream;
said data stream having a first portion encrypt-
ed in accordance with a first pseudo-noise se-
quence; and
a second portion encrypted with a second 5
pseudo-noise sequence.

10

15

20

25

30



35


40



45

50


55

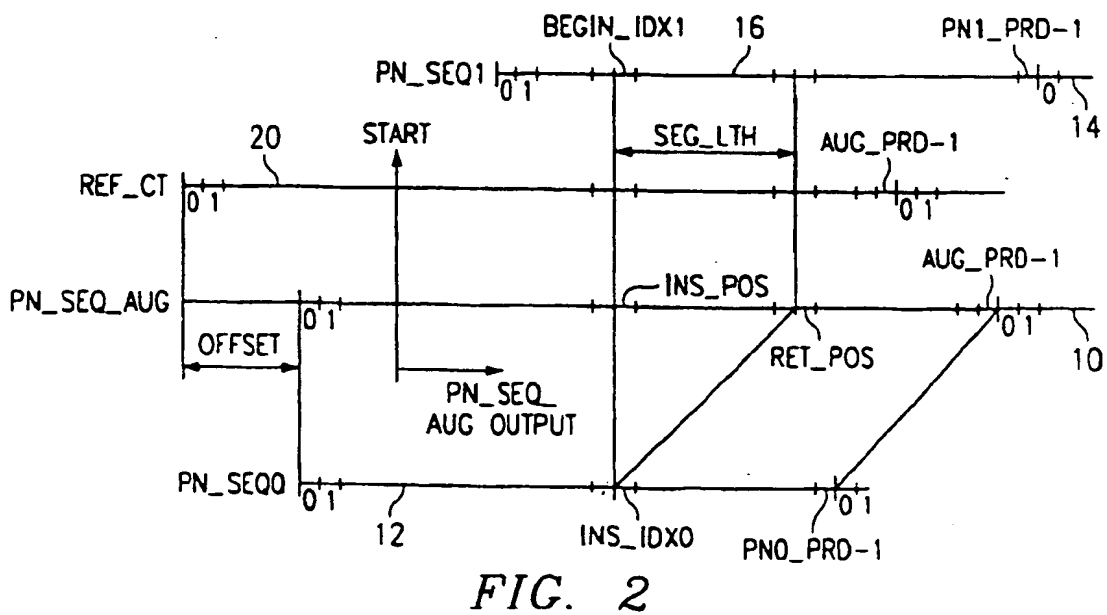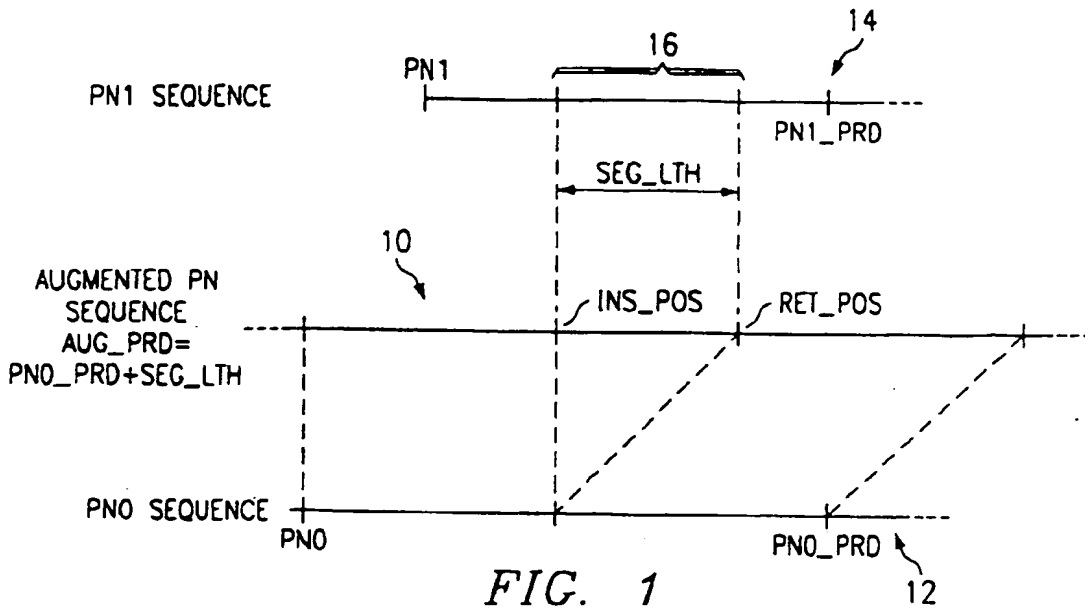

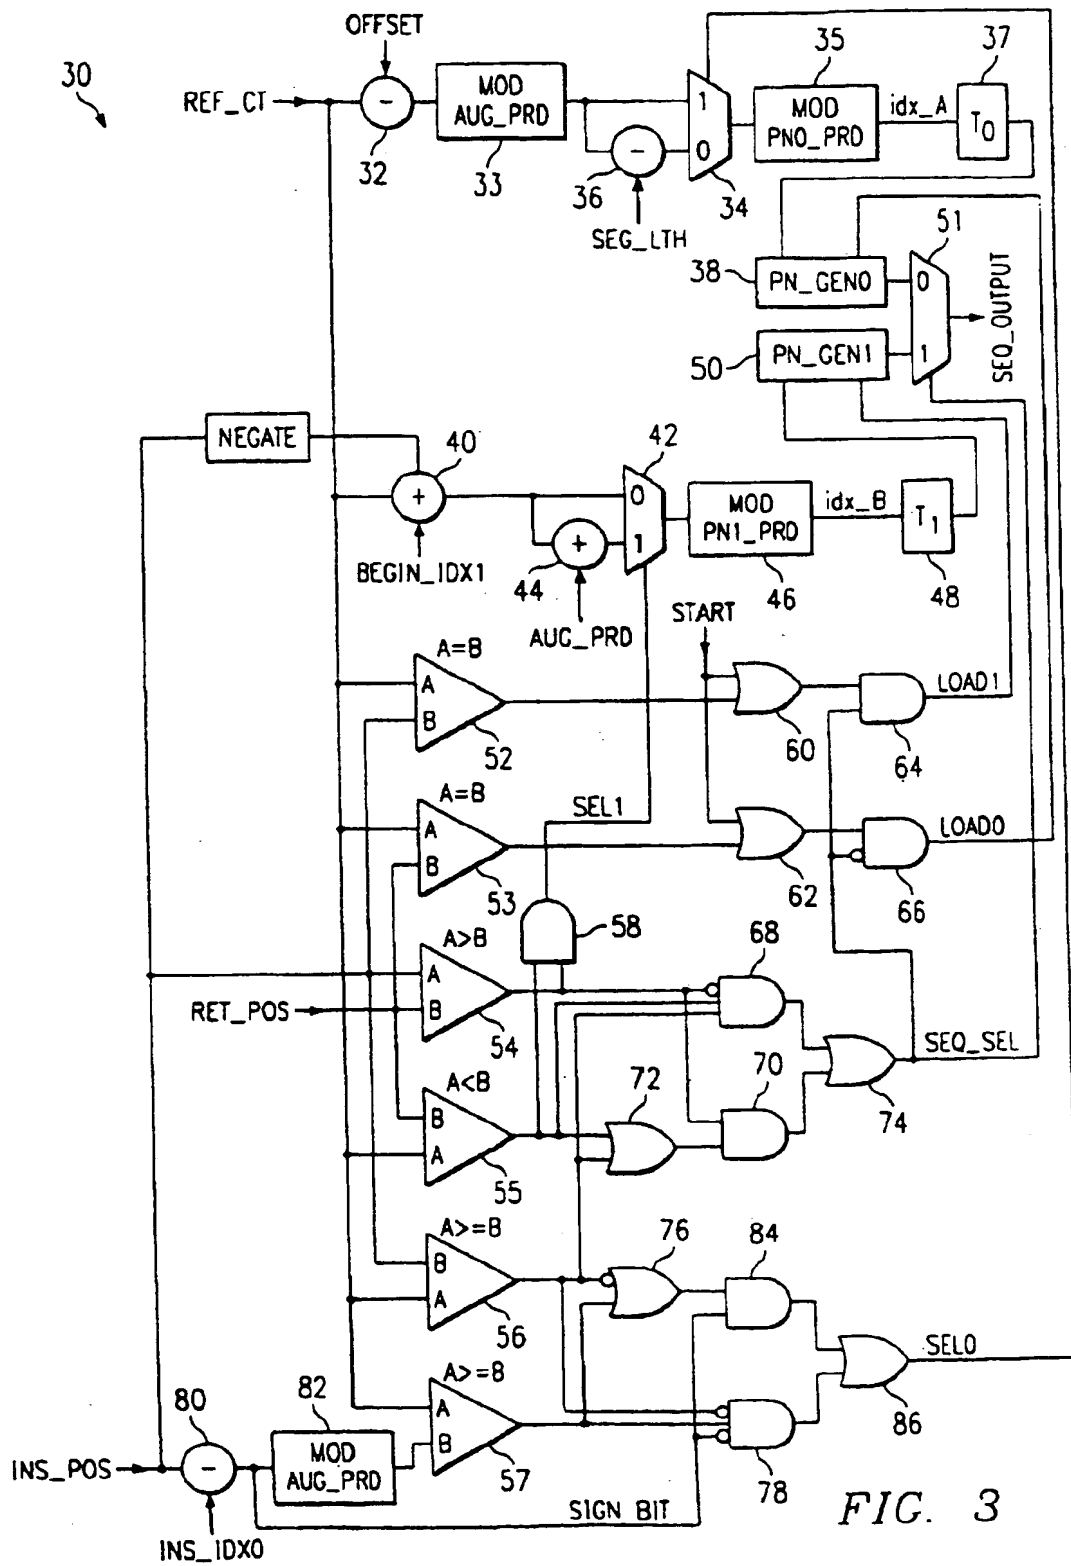

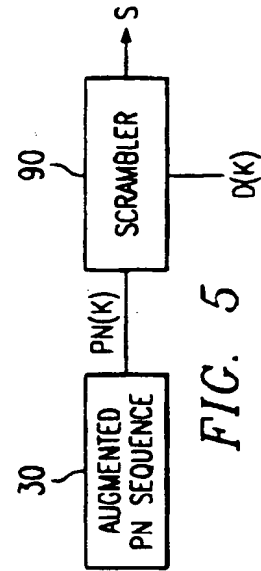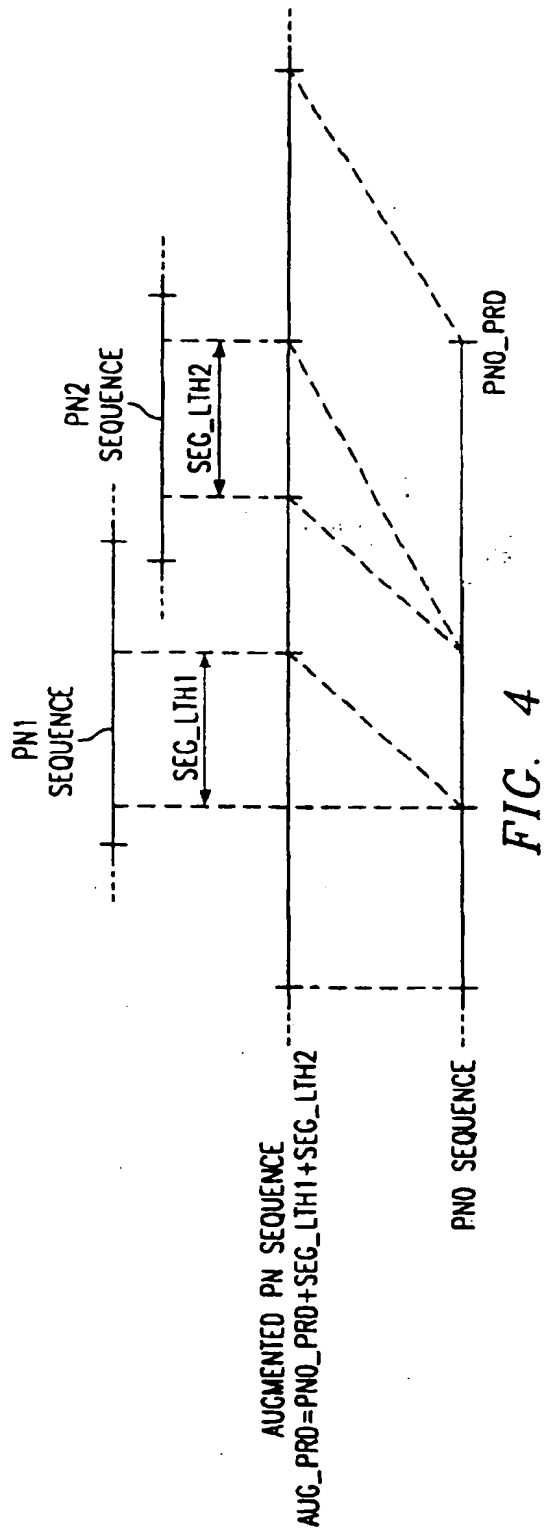

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 049 288 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
12.06.2002 Bulletin 2002/24

(51) Int Cl.7: **H04L 9/22**

(43) Date of publication A2:
02.11.2000 Bulletin 2000/44

(21) Application number: **00303587.0**

(22) Date of filing: **28.04.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Gu, Zhengou**
Plano, TX 75025 (US)

(74) Representative: **Potter, Julian Mark**
D. Young & Co.,
21 New Fetter Lane
London EC4A 1DA (GB)

(30) Priority: **30.04.1999 US 302608**

(71) Applicant: **Texas Instruments Incorporated**
Dallas, Texas 75251 (US)

(54) **Pseudo-noise sequence**

(57) An augmented pseudo-noise sequence (10) is generated from a two or more pseudo-noise sequences, using LFSRs or other such devices. A segment (16) of a one pseudo-noise sequence (14), having an arbitrary

length, is inserted into another pseudo-noise sequence (12) at an arbitrary position, making the augmented sequence difficult to decipher by a third party. Additional segments of arbitrary length can also be inserted at arbitrary positions for further complexity.

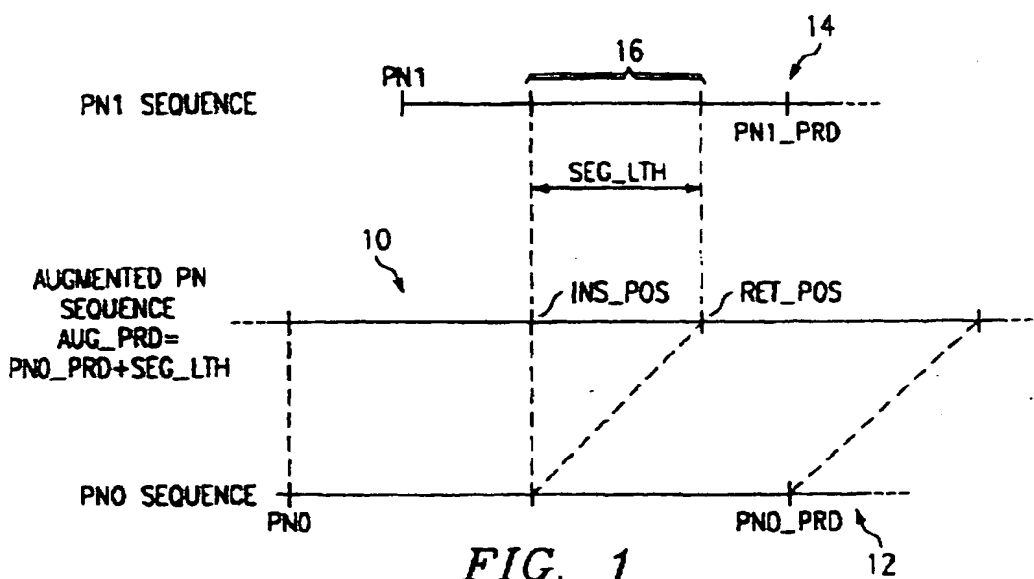


FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 3587

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 4 776 012 A (ZSCHEILE JR JOHN W ET AL) 4 October 1988 (1988-10-04)	1-3, 8, 10-12, 18, 20, 21	H04L9/22
Y	* abstract * * column 2, line 18 - column 4, line 17 *	9, 19	
X	EP 0 782 069 A (NIPPON ELECTRIC CO) 2 July 1997 (1997-07-02)	1-3, 10-12, 16, 20, 21	
X	US 4 809 295 A (LUNDQUIST ALAN E ET AL) 28 February 1989 (1989-02-28)	1-3, 10-12, 20, 21	
X	EP 0 345 845 A (SITS SOC IT TELECOM SIEMENS) 13 December 1989 (1989-12-13) * column 3, line 52 - column 4, line 10 * * figure 2 *	22	
Y	US 5 878 075 A (FRANK COLIN D ET AL) 2 March 1999 (1999-03-02)	9, 19	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04L H04J H04B
A	* column 2, line 46 - column 3, line 15 *	4-6, 8, 13-15, 18	
A	US 4 866 735 A (MORI MASA HARU ET AL) 12 September 1989 (1989-09-12) * abstract * * figure 1 * * column 3, line 15 - column 4, line 14 *	4-6, 13-15	
A	US 4 873 699 A (SAUSSIER ALAIN ET AL) 10 October 1989 (1989-10-10) * column 3, line 40 - line 49 *	4, 13	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16 April 2002	Examiner: Dujardin, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P0-C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 3587

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-04-2002

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 4776012	A	04-10-1988	NONE		
EP 0782069	A	02-07-1997	JP	9179726 A	11-07-1997
			AU	7539696 A	03-07-1997
			CA	2193196 A1	26-06-1997
			EP	0782069 A1	02-07-1997
US 4809295	A	28-02-1989	NONE		
EP 0345845	A	13-12-1989	IT	1217755 B	30-03-1990
			AU	611562 B2	13-06-1991
			AU	3516589 A	07-12-1989
			EP	0345845 A2	13-12-1989
			NO	892196 A	04-12-1989
			ZA	8904106 A	28-03-1990
US 5878075	A	02-03-1999	CA	2210211 A1	26-01-1998
			CN	1172386 A	04-02-1998
			JP	3091717 B2	25-09-2000
			JP	10079688 A	24-03-1998
			KR	227584 B1	01-11-1999
US 4866735	A	12-09-1989	JP	1036233 A	07-02-1989
			DE	3825742 A1	09-02-1989
			FR	2618964 A1	03-02-1989
			GB	2208461 A , B	30-03-1989
US 4873699	A	10-10-1989	FR	2612716 A1	23-09-1988
			EP	0284493 A1	28-09-1988

EPO FORM 2048

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)